


Total Series - Gas Approved,
Full Bore, Brass Ball Valve

Application

Industrial, pneumatic, domestic and hydraulic installations

Media

- ✓ Gas
- ✓ Air
- ✓ Water (non-drinking)
- ✓ Steam
- ✓ Petrol
- ✓ Oil

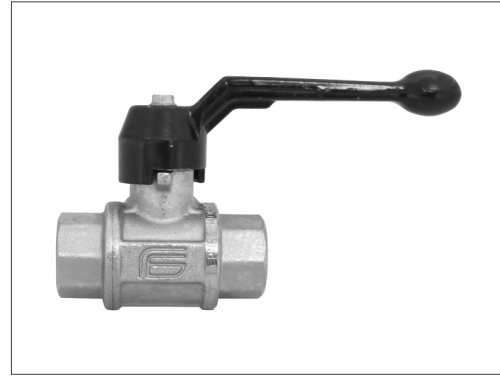

Operating Temperature

-20°C to +150°C

Construction:

Body

- Nickel plated brass

Standard Packing Material

- Teflon (P.T.F.E.)

Ball

- Chrome plated brass

Lever Handle

- Black die cast aluminium (polyurethane coated) with zinc plated bolt

Stem

- Brass

Pipe Thread Standard

Female AS1722.1 (Rp series)

A.G.A. Approval

5301